



Penetrant Testing

Product information

MR® 79 Remover (AMS 2644) Class 2 - Solvent

PRODUCT DESCRIPTION

- Remover for Penetrant Testing according to EN ISO 3452-1, EN ISO 3452-6 and ASTM E1417
- Listed on QPL SAE AMS 2644 (QPL)
- Class 2 according to AMS 2644
- Method C according to EN ISO 3452-2
- Ketone mixture
- Dries quickly**
- Leaving no residues
- Less toxicity
- Free of hydrocarbons
- Aerosol can is overhead sprayable - 360°
- Suitable for all metals (suitability for plastics needs testing prior to use)

PICTURE



PRODUCT CHARACTERISTICS

Form:	clear liquid
Colour:	transparent
Basis:	solvent
Flash point (bulk):	-18 °C
Density	20°C: 0,790 g/cm ³ 38°C: 0,885 g/cm ³
Kinetic viscosity	20°C: 0,280 mm ² /s 38°C: 0,196 mm ² /s
Evaporating time:	fast
Cleaning effect:	high
Propellant (aerosol can):	propane/butane
Odour:	characteristic

MINIMUM SHELF LIFE

- Bulk: 4 years, stored at storage temperature
- Aerosol: 3 years, stored at storage temperature


TEMPERATURES

- Storage: +5 - +45°C
- Usage: +4 - +52°C (ASTM E1417)
+10 - +50°C (EN ISO 3452-1)
-30 - +10°C (EN ISO 3452-6)

FURTHER INFORMATION

- Process description according to EN ISO 3452-1 available on request or on www.mr-chemie.de.
- Process description according to ASTM E1417 see product information MR® 62 or MR® 311-R (AMS)

DELIVERY FORM

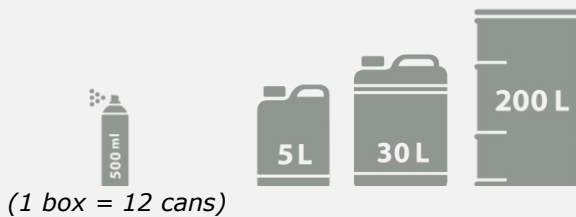

APPROVALS/SPECIFICATIONS

EN ISO 3452-2	✓
EN ISO 3452-6	✓
AMS 2644	✓
QPL SAE AMS 2644	✓
ASTM E1417	✓
ASTM E165	✓
ASME Code V, Art. 6	✓
RCC-M	✓
PMUC	✓
TLV 9017 01:2011-01	✓

Low content of halogens and sulphur according to EN ISO 3452-2 and ASME Code, Section V, Article 6 T-641.