


# SN-M2207NT-B

## Face Recognition Terminal

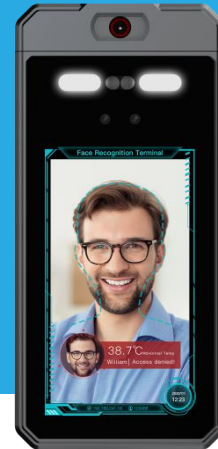


### Key Features

- Non-contact temperature measurement
- Temperature measuring range: 30 °C to 45 °C (86 °F to 113 °F)
- Temperature measuring accuracy: 0.1° C, deviation: ± 0.3°C
- Temperature measuring distance: 0.3 to 1.2 m, response speed: ≤ 100ms
- Face recognition distance: 0.3 to 2.0 m
- Voice prompt will be triggered and door status (open/close) can be configured when detecting abnormal temperature
- Face recognition duration ≤ 0.2 s per face, face recognition accuracy rate ≥99.8%
- 30,000 face capacity, 60,000 event capacity
- Displays temperature measurement results on the authentication page
- 7 Inch IPS HD display, video lag-free, ghost-free
- Suggested height for face recognition: between 1.2 m and 2.2 m
- Support I/O, WG26, WG34, RJ45, USB, Door lock interfaces

# Specification

Temperature Measurement	
Temperature Range	30 °C to 45 °C (86 °F to 113 °F)
Sensor	Uncooled Microbolometer
Resolution	120×90
Measurement Deviation	±0.3°C
Measurement Accuracy	0.1°C
Measuring Distance	0.3 to 1.2 m (0.98 to 3.94 feet)
Response Speed	≤ 100ms
Basic	
Display	7 inch display
Camera	Dual-lens
Sensor	1/2.8" 2MP Progressive Scan CMOS
WDR	120dB
Light Compensation	Auto white light, Auto IR light
Storage Capacity	RAM: 1GB, EMMC: 8GB
Function	
Authentication Mode	Face, Body temperature, Mask Detection optional
Face Recognition Distance	0.3 to 2.0 m (0.98 to 3.94 feet)
Face Anti-Spoofing	Support
Audio Prompt	Support
Face Recognition Accuracy	≥ 99.8%
Face Recognition Time	≤ 0.2 s
Face Image Capacity	30,000
Record Capacity	60,000 event capacity
Interface	
Ethernet	1 RJ45 10M/100M Ethernet port
Alarm	3-ch alarm input, 1-ch alarm output
Wiegand Input	1 (Support peripheral card reader )
Wiegand Output	1 (WG26, WG34)
USB	1 USB2.0 port
Door Lock Output	1 (Switch quantity)
General	
Power Supply	12V 2A DC
Power Consumption	Max 20 W
Working Temperature	20°C ~ 35°C (68°F ~ 95°F), No airflows indoor
Working Humidity	0~90%, no condensing
Dimensions (L× W×H)	120 × 28 × 256 mm (4.72 × 1.10 × 10.08 inch)
Net Weight	1 kg (2.2 lb)

## Dimensions (mm)

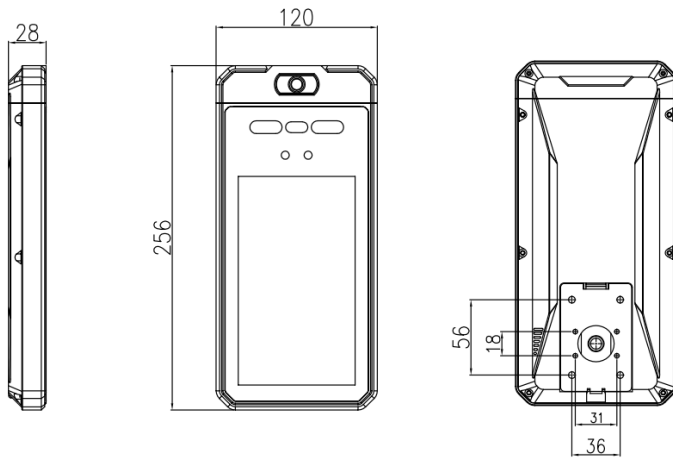

## Accessories

### Optional:

Various stands